

*NEW &  
IMPROVED*



# 6700 SERIES RIP-STRIP

- *ONE TRIP PROVIDES DEEP TILLAGE AND QUALITY IN-ROW SEEDBED PREPARATION*
- *LEAVES SURFACE RESIDUE FROM PREVIOUS CROPS IN THE ROW MIDDLE TO PROTECT AGAINST SOIL EROSION*



**THE 6700 SERIES RIP-STRIP** SUBSOILS AND PREPARES AN 8" TO 18" WIDE SEEDBED ON ROW CENTERS FROM 30" TO 40" IN CONSERVATION TILLAGE CONDITIONS WITH OR WITHOUT SEED PLANTERS ATTACHED. WHEN EQUIPPED WITH THE COVER CROP ROLLER (CCR) (PATENT PENDING) IN LIEU OF INDIVIDUALLY MOUNTED RESIDUE CUTTING COULTERS, IT EASILY ROLLS DOWN THE COVER CROP IN THE DIRECTION OF TRAVEL. QUALITY AND CRAFTSMANSHIP HAVE BEEN PLACED IN THE DESIGN OF THE RIP-STRIP'S 7X7 HEAVY DUTY, ALL WELDED, DOUBLE-FRAME TOOLBAR.

## FEATURES




- 3/16" x 20" DURA FLUTE
- 1000 POUNDS DOWN PRESSURE
- FOUR BOLT HUB, MAINTENANCE FREE, TRI-PLY SEALED BEARING



- ROLLS DOWN THE COVER CROP IN DIRECTION OF TRAVEL WHILE CUTTING RESIDUE, ALLOWING SHANKS TO OPERATE WITHOUT DRAGGING
- ENHANCES MOISTURE RETENTION AND WEED SUPPRESSION
- ROLL, RIP, STRIP AND PLANT ALL IN ONE PASS IN ANY CONVENTIONAL COVER CROP
- RETRO FIT KITS AVAILABLE FOR MOST EARLIER MODEL KMC RIP-STRIPS



- RESET ON THE GO WITHOUT LIFTING THE IMPLEMENT
- ONE INCH THICK MATERIAL
- HIGH-STRENGTH, ABRASION RESISTANT STEEL
- WEAR SHIN PROTECTED
- RESET ON THE GO SHANKS WITH 6000 POUNDS TRIP FORCE
- BREAK THE HARDPAN UP TO 20" DEEP (UP TO 18" WITH COVER CROP ROLLER)

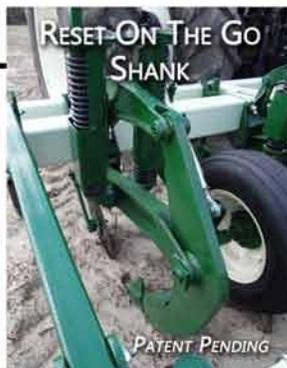

- PARALLEL LINKAGE ALLOWS TILLAGE COMPONENTS TO FLOAT INDEPENDENTLY AND REMAIN IN SOIL WHEN SHANK TRIPS
- DOWN PRESSURE SPRINGS IN PARALLEL LINKS PROVIDE FOR VARYING DOWN PRESSURE
- TILLAGE COULTERS AND PRESS WHEELS ARE ANGLE ADJUSTABLE FROM 0 TO 9 DEGREES



MANY ROW TILLAGE COMPONENT CHOICES FOR YOU TO CHOOSE FROM!

## AVAILABLE OPTIONS



PLANTER LIFT ASSIST WHEELS

- DUAL OR QUAD PLANTER LIFT ASSIST WHEELS FOR CARRYING AND ATTACHING PLANTERS BEHIND RIP-STRIP
- OPTIONAL WEIGHT TRANSFER KIT: WITH THE USE OF THIS KIT, PLANTER LIFT ASSIST WHEELS CAN FUNCTION WITHOUT SEED PLANTER ATTACHED AS HELPER WHEELS TO THE TRACTOR LIFT SYSTEM.



NEWLY DESIGNED ROW MARKERS

ROW MARKERS FOLD COMPACTLY FOR EASIER TRANSPORT



- ATTACHES TO THE FRONT SWIVEL COULTER TO REMOVE RESIDUE AHEAD OF TILLAGE COMPONENTS
- CLEANING DISCS ARE ATTACHED TO INDEPENDENT FLOATING ARMS
- FRONT COULTER MODELS ONLY



ROW CLEANERS

## IMPROVEMENTS OVER PREVIOUS MODEL:


- DEEPER SUBSOILING RANGE
- TILLAGE COMPONENTS FLOAT INDEPENDENTLY AND REMAIN IN SOIL WHEN SHANK TRIPS
- LESS MOVING PARTS
- LESS MAINTENANCE
- EASILY CONVERTIBLE TO RIPPER-BEDDER WITH THE PURCHASE OF A FEW COMPONENTS
- QUICK, EASY, AND PRECISE TILLAGE COULTER ADJUSTMENT
- QUICK, EASY, AND WRENCHLESS DOWN PRESSURE ADJUSTMENT OF TILLAGE COULTERS AND CRUMBLER ROLLER ATTACHMENT



# SPECIFICATIONS



**Kelley Manufacturing Co.**  
 P.O. Box 1467 Tifton, Georgia 31793  
[www.kelleymfg.com](http://www.kelleymfg.com)  
 1-800-444-5449

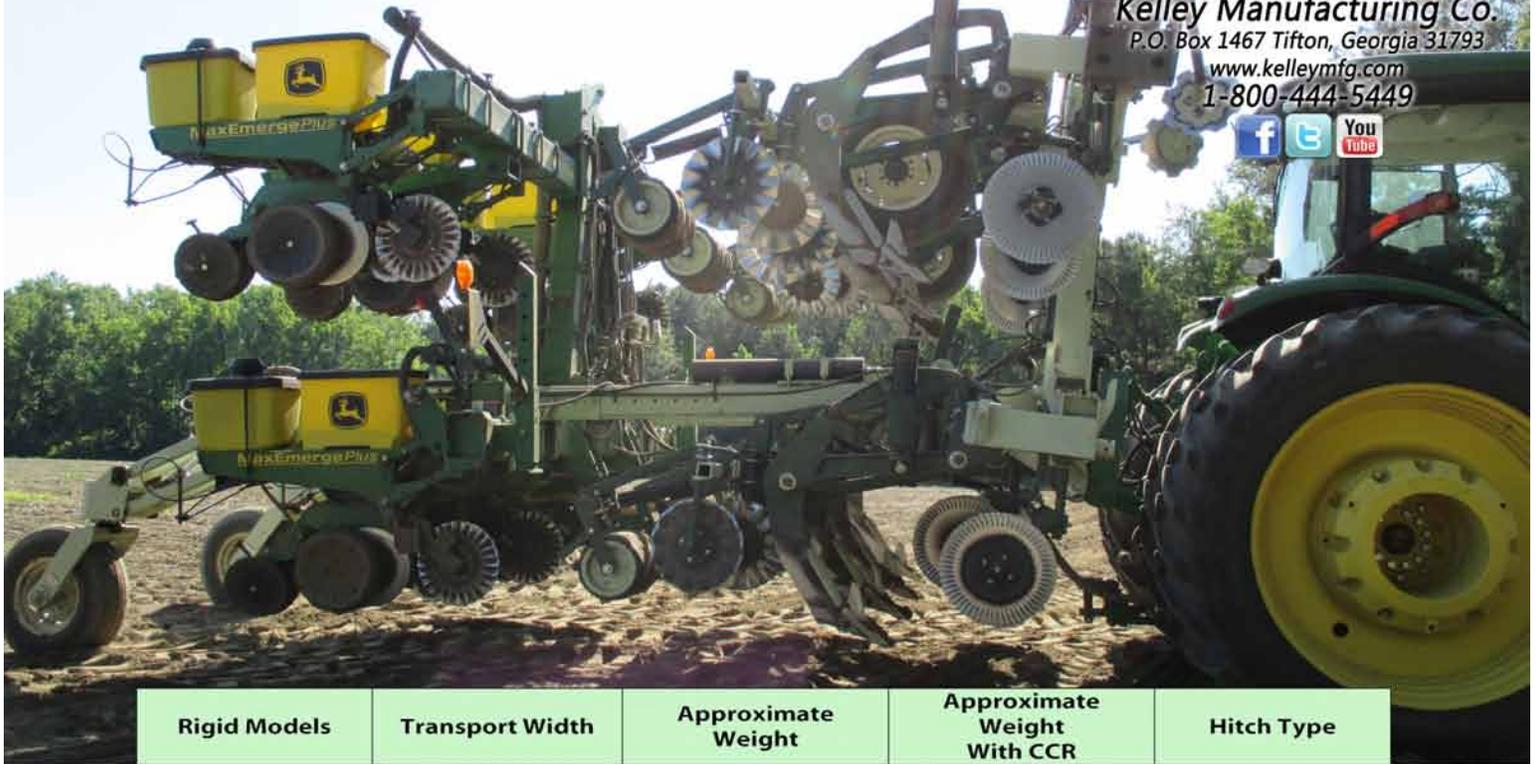

Rigid Models	Transport Width	Approximate Weight	Approximate Weight With CCR	Hitch Type
4 Row 36"	161"	3,365 lb	3,720 lb	CAT II-3PT, CAT II-QC, CAT III-3PT, CAT III-QC, CAT III-NQC
4 Row 38"	161"	3,365 lb	3,720 lb	CAT II-3PT, CAT II-QC, CAT III-3PT, CAT III-QC, CAT III-NQC
4 Row 40"	161"	3,365 lb	3,720 lb	CAT II-3PT, CAT II-QC, CAT III-3PT, CAT III-QC, CAT III-NQC
6 Row 30"	183"	4,430 lb	4,765 lb	CAT III-3PT, CAT III-QC, CAT III-NQC
6 Row 36"	229"	4,605 lb	5,005 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC
6 Row 38"	229"	4,605 lb	5,005 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC
6 Row 40"	251"	4,765 lb	5,210 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC
8 Row 30"	251"	5,885 lb	6,220 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC
<b>Stack Fold</b>				
8 Row 36"	162"	7,475 lb	8,520 lb	CAT III-3PT, CAT III-QC, CAT III-NQC
8 Row 38"	162"	7,475 lb	8,520 lb	CAT III-3PT, CAT III-QC, CAT III-NQC
8 Row 40"	162"	7,475 lb	8,580 lb	CAT III-3PT, CAT III-QC, CAT III-NQC
12 Row 30"	220"	10,070 lb	11,050 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC
12 Row 36"	242"	10,595 lb	11,755 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC
12 Row 38"	242"	10,595 lb	11,755 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC
12 Row 40"	288"	10,920 lb	12,185 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC
16 Row 30"	288"	12,420 lb	13,510 lb	CAT III-3PT, CAT III-QC, CAT III-NQC, CAT IV-NQC

- RECOMMENDED HORSEPOWER REQUIREMENTS: 25-30 HP PER SHANK
- TOOLBARS: 4"x7" FRONT HITCH BAR, 7"x7" MAIN TOOLBAR
- 2 1/2" FOR MOUNTING ROW TILLAGE COMPONENTS